

562A is Chopped from E glass fibers coated with Silane-based sizing. 562A Chopped Strands are compatible with unsaturated polyester, vinyl ester and epoxy resin systems and designed for compression or injection molding process.



Product Features

- ◎ Low viscosity and excellent flowability of the BMC paste
- ◎ Low static and low fuzz, fast and good dispersion in resins
- ◎ Good processing and excellent mechanical properties

Identification


Example	ECS13-06-562A
Type of Glass	E
Chopped Strands	CS
Filament Diameter, μm	13
Chop Length, mm	3, 6, 12
Sizing Code	562A

Technical Parameters

Filament Diameter (%)	Moisture Content (%)	LOI Content (%)	Chop length (mm)
ISO 1888	ISO 3344	ISO 1887	Q/JS J0361
± 10	≤ 0.10	0.80 ± 0.15	± 1.0

Storage

Unless otherwise specified, fiberglass products should be stored in a dry, cool and rain-proof area. It is recommended that the room temperature and humidity should be always maintained at 15°C - 35°C and 35%-65% respectively.

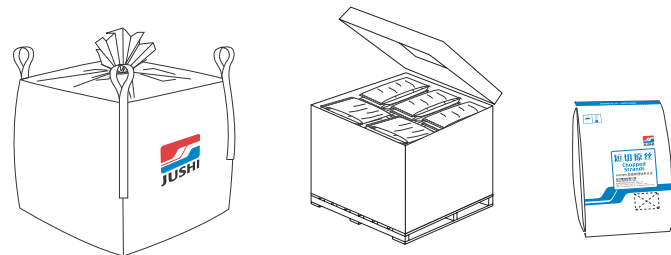

Packaging

* The product can be packed in bulk bags, heavy-duty box and composite plastic woven bags;
For example:
Bulk bags can hold 500kg-1000kg each;
Cardboard boxes and composite plastic woven bags can hold 15kg-25kg each.

Bulk bag

Length mm (in)	1030 (40.5)
Width mm (in)	1030 (40.5)
Height mm (in)	1000 (39.4)

Heavy-duty box

Length mm (in)	1120 (44)
Width mm (in)	1120 (44)
Width mm (in)	1050 (41.3)

Composite plastic woven bag

Length mm (in)	850 (33.5)
Width mm (in)	500 (19.7)
Height mm (in)	120 (4.7)